

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 31 TOWNSHIP 16 RANGE 5

DATE: 7-8-01 03-01-06

PARTY CHIEF: Whiteside Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 10-15-96

IN. S.P.C. E ZONE, NAD 83

NAME: 16053104

N: 504170.3610(m)

E: 69187.4010(m)

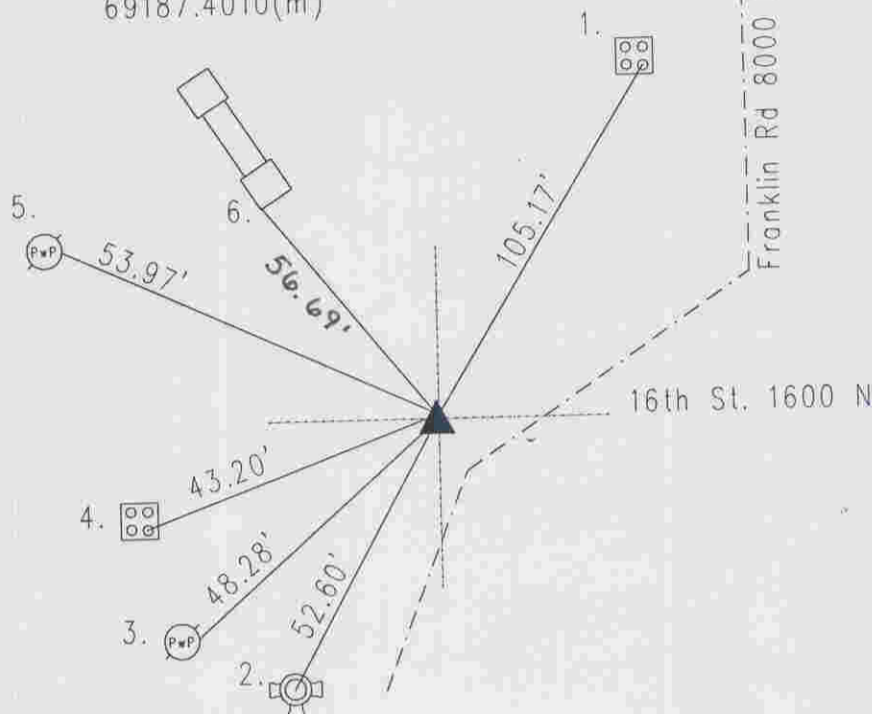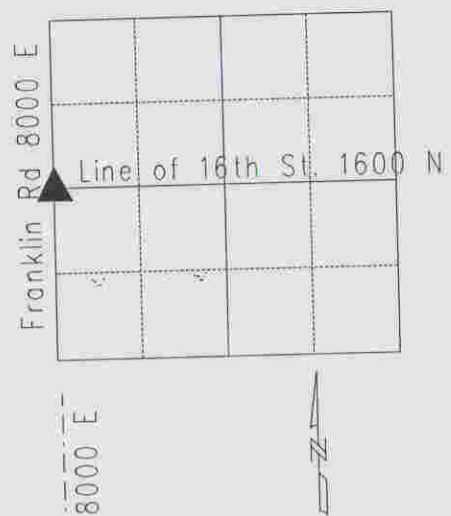

Original post set 1820 by Hendricks with witnesses: 15" white oak N 31 E 13 links, 13" white oak N 35 W 34 links per Marion County Atlas pg. 11. No reference to this corner in the Warren Township Legal Survey Book. 2-15-51 called for bolt set over stone. 7-3-59 called railroad spike set. 7-15-70 called nail found. 2-24-76 called road nail. Excavated 9-20-88 and harrison set per construction ties. Re-tied 10-15-96 by Kiste. Re-tied 7-8-01 by Whiteside.

16053104

REF.	DISTANCE	DESCRIPTION
1.	105.17'	Cut 'x' SE-bolt of signal pole base
2.	52.60'	Top nut of fire hydrant
3.	48.28'	PK nail E PwP#40-519 28"up
4.	43.20'	Cut 'x' SE-bolt of signal pole base
5.	53.97'	PK nail E PwP no# 24"up
6.	56.69'	PK nail W southerly post for "park" sign